

**BENEFITS**

- Excellent thermal insulating performances
- Free of binder or lubricant
- Thermal stability
- Low heat storage
- Flexible and resilient
- Immune to thermal shock
- No reaction with alumina based bricks in application in the range of the typical use temperature
- Exonerated from any carcinogenic classification under nota Q of directive 97/69 EC

DESCRIPTION

Superwool™ 607™ HT Blanket is made of Superwool 607™ HT long fibres. It exhibits outstanding insulating properties at elevated temperatures. Superwool 607™ HT Blanket has an excellent thermal stability and retains its original soft fibrous structure up to maximum continuous use temperature.

Blanket contains neither binder nor lubricant and does not emit any fume or smell during the first firing.

It is flexible, easy to cut and shape and easy to install.

TYPE

Blanket made from high temperature insulation wool.

CLASSIFICATION TEMPERATURE

1300°C (ENV 1094-3)

The maximum continuous use temperature depends on the application. In case of doubt, refer to your local Thermal Ceramics distributor for advice.

SUPERWOOL™ is a patented technology that manufactures a high temperature insulation wool which has been developed to have a low biopersistence (information upon request). This product may be covered by one or more of the following patents or patent applications, and foreign equivalents:-

US 5332699, US 5714421, US 5811360, US 5821183, US 5928975, US 5955389, US 5994247, US 6180546, EP 0621858, EP 0679145, US 6861381, US 7153796, EP 0710628, EP 1474366, GB 2383793, WO2006/048610.

A list of foreign patent numbers is available upon request to The Morgan Crucible Company plc.
THERMAL CERAMICS, SUPERWOOL and 607 are trademarks of The Morgan Crucible Company plc.

MAIN PROPERTIES

Classification temperature °C 1300

Typical Properties

- Colour white
- Density kg/m³ 64, 96, 128, 160
- Tensile strength (ENV 1094-7)

64kg/m ³	kPa	30
96kg/m ³	kPa	50
128kg/m ³	kPa	75
160kg/m ³	kPa	95

High Temperature Performance


- Permanent linear shrinkage (ENV 1094-7) % <2 after 24 hours isothermal heating at 1260°C

- Thermal conductivity (ASTM C-201) at mean temperature of:

		96kg/m ³	128kg/m ³
200°C	W/m.K	0.05	0.04
400°C	W/m.K	0.10	0.08
600°C	W/m.K	0.19	0.14
800°C	W/m.K	0.32	0.23
1000°C	W/m.K	0.48	0.34
1200°C	W/m.K	0.69	0.48

Chemical Composition

SiO ₂	%	70-80
CaO + MgO	%	18-25
Others	%	<3

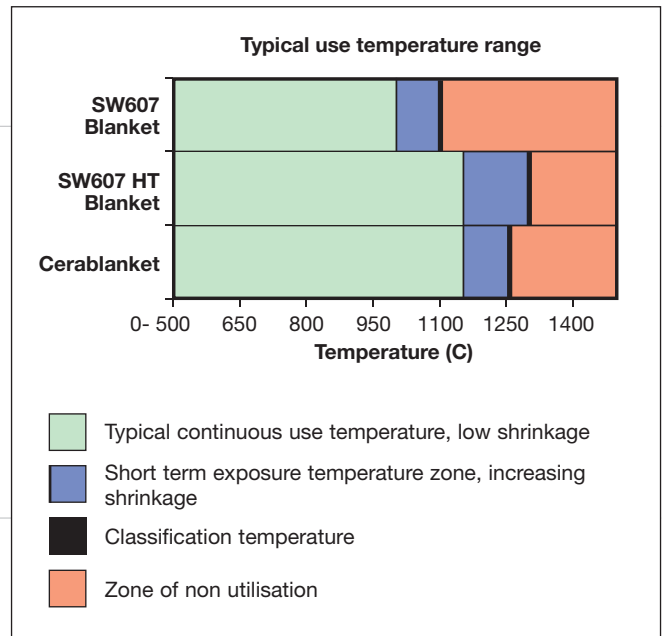

Availability and Packaging

Superwool 607™ HT Blankets are packed in cartons, 1260 x 940mm pallet + stretchable film.

Thick. mm	Density kg/m ³				Length mm	Width mm	m ² / carton
	64	96	128	160			
6		X	X	○	4 x 5500	610	13.42
10		X	X	○	18500	610	11.28
13		X	X	X	14640	610	8.93
19	○	X	X	X	9760	610	5.95
25	○	X	X	X	7320	610	4.46
38	○	X	X	○	4880	610	2.98
50	○	X	X	○	3660	610	2.23

Marks (○) and width 1220mm upon request (subject to minimum order requirements).

Your local contact:

Distributed by:

The values given herein are typical average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Therefore, the data contained herein should not be used for specification purposes. Check with your Thermal Ceramics office to obtain current information.

Thermal Ceramics Marketing Offices

Thermal Ceramics Americas
 2102 Old Savannah Road
 Augusta, Georgia 30903
 Tel: +1 706 796 4200
 Fax: +1 706 796 4398
 E-mail: tceramics@thermalceramics.com

Thermal Ceramics Asia Pacific
 28 Jalan Kilang Barat
 Kewalram House, Singapore 159362
 Tel: +65 6273 1351
 Fax: +65 6273 0165
 E-mail: thermalceramics@tcasia.com.sg

Thermal Ceramics Europe
 Tebay Road, Bromborough
 Wirral CH62 3PH UK
 Tel: +44 (0) 151 334 4030
 Fax: +44 (0) 151 334 1684
 E-mail: marketing@thermalceramics.co.uk

Website: www.thermalceramics.com